



**PRODUCT DESCRIPTION**

Cost effective, High efficiency lighting  
Easy mounting

**APPLICATIONS**

Workshop Areas / Retail / Hallway / Utility Rooms

**SPECIFICATIONS**


Model Name	A2W4A-042	
Power Consumption*	42 W	42 W
Correlated Color Temperature*	4,000K	5,000K
Light Output*	4,018 lm	4,090 lm
Efficacy*	97 lm/W	98 lm/W
Color Rendering Index	83 CRI	
Beam Angle	120°	
LED Chip Manufacturer	SAMSUNG	
Fixture Manufacturer	Samjin LND / Made in Korea	
Input Voltage	100~277 Vac	
Total Harmonic Distortion	Max 20%	
Power Factor	≥ 0.9 at Max Load	
Input Frequency	50 / 60 Hz	
Size ( L x W x H )	46.6 x 6.6 x 3.1 (in)	46.6 x 6.6 x 2.3 (in, Surface Mount)
Weight (Including Driver)	6.4 lb	
IP Rating	IP20	
Operating Temperature	14°F ~ 122°F (-10°C ~ 50°C)	
Limited Warranty	10 Years (Refer to website for details)	

**CERTIFICATIONS**



5,000K DLC listed. 4,000K DLC pending.

**DIMENSIONS**

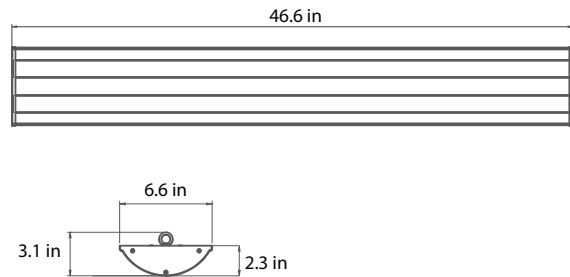

**Options**

Control Options	1~10V (Default)
Mounting	Surface / Pendant

\*Tolerance: ± 5%

**ORDERING INFORMATION**

Order Code Example : **A2W4A-04250DIUS\_SM**

A2W	4A	-	042	XX	XX
PRODUCT FAMILY	SIZE		POWER	CCT	MOUNTING
Arch 2 Way	4 ft		42 W	40 = 4000K 50 = 5000K	PM = Pendant Mount SM = Surface Mount