



PRODUCT DESCRIPTION

Easy replace & install
Glare-free & highly efficient light
Optimal uniformity

APPLICATIONS

Classroom / Indoor Parking Lot / Exhibition / Factory / Airport / Gym

SPECIFICATIONS

Model Name	SR60	
Power Consumption*	61 W	62 W
Correlated Color Temperature*	4,000 K	5,000 K
Light Output*	6,426 lm	6,782 lm
Efficacy*	105 lm/W	109 lm/W
Color Rendering Index	80 CRI	
Beam Angle	110°	
LED Chip Manufacturer	SAMSUNG	
Fixture & Driver Manufacturer	KMW Inc. / Made in Korea	
Input Voltage	100~277 Vac	
Total Harmonic Distortion	Max 20%	
Power Factor	≥ 0.9 at Max Load	
Input Frequency	50 / 60 Hz	
Surge Protection	Line-Line 2KV, Line-FG 4KV	
Size (L x W x H)	50.3 x 7.1 x 4.8 (in)	
Weight (Including Driver)	5.0 lb	
Material	Body	Aluminum 1.2T, Powder Coating Grey
	Cover	Polycarbonate 1.2 (Diffuser)
IP Rating	IP65	
Mounting Option	Surface Mount	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)	
Limited Warranty	10 Years (Refer to website for details)	

Options


Control Options	On/Off
Sensors	Occupancy Sensor available

*Tolerance: ± 5%

CERTIFICATIONS



DIMENSIONS

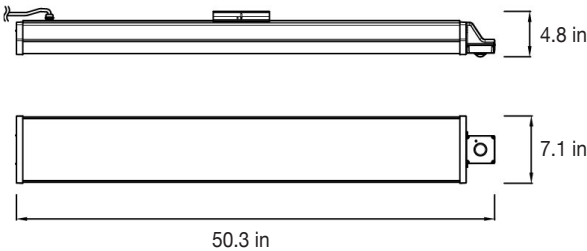

ORDERING INFORMATION

Order Code Example : **SR60-A50SUN**

SR	60	-	A	XX	S	U	X
	POWER		INPUT VOLTAGE	CCT (K)	MOUNTING	REGION	CONTROL SYSTEM
	60W		100~277V	40 =4,000K 50 =5,000K 57 =5,700K	Surface Mount	US/CAN	N = None (On/Off) O = Occupancy Sensor